
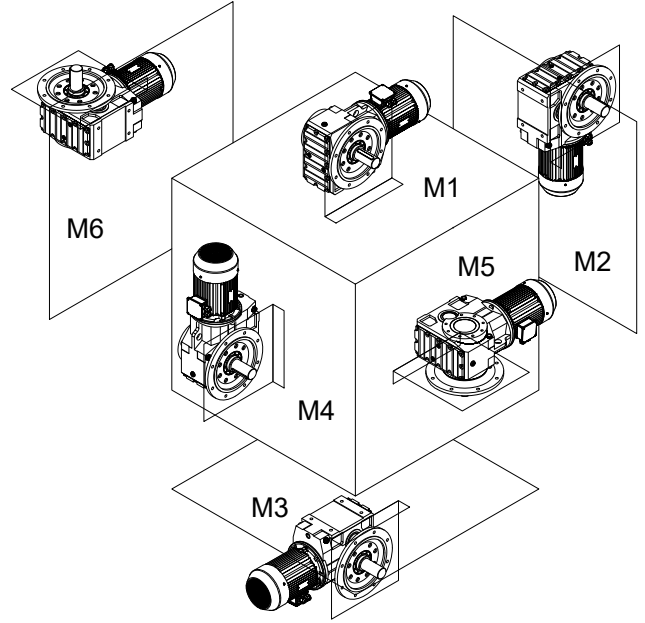



TR MONTAJ POZİSYONU VE YAĞ MİKTARI

EN MOUNTING POSITION AND OIL CAPACITY

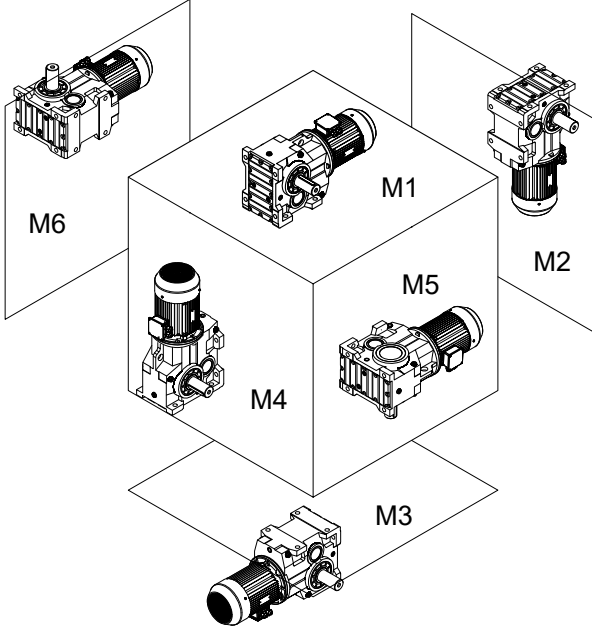


Yağ Miktarı / Oil Capacity






Tip / Type	M1	M2	M3	M4	M5	M6
DK173..	0.4	0.8	0.9	1.2	0.9	0.9
DK273..	0.6	0.9	1.0	1.4	1.1	1.1
DK373..	2.6	2.6	2.8	3.8	2.9	2.9
DK473..	4.5	4.2	4.6	6.1	4.4	4.6
DK573..	7.5	8.2	8.9	11.2	8.0	8.2
DK673..	6.1	12.2	13.7	17.5	13.7	14
DK773..	6.5	13.2	16	21	15	15




**TR MONTAJ POZİSYONU**

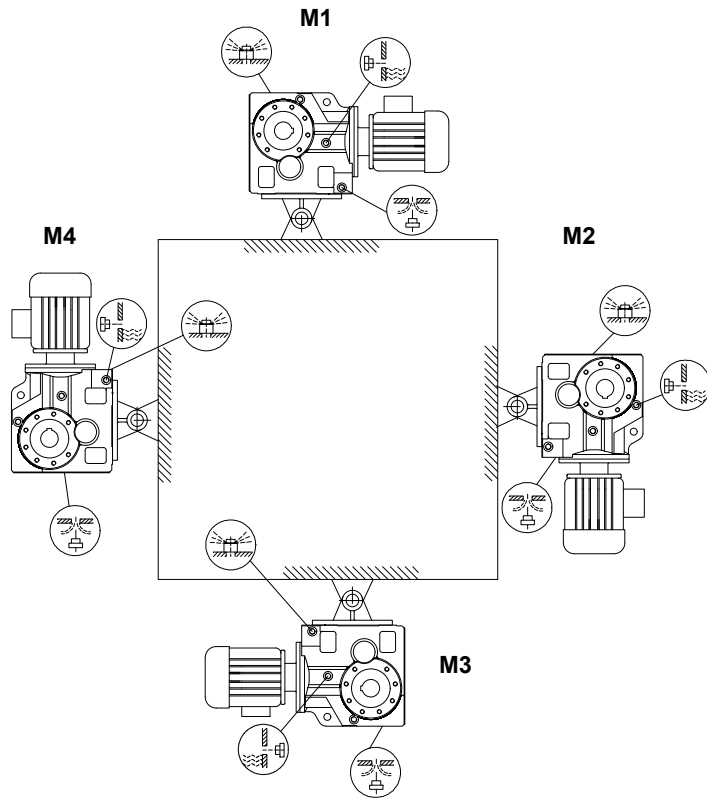


**EN MOUNTING POSITION**

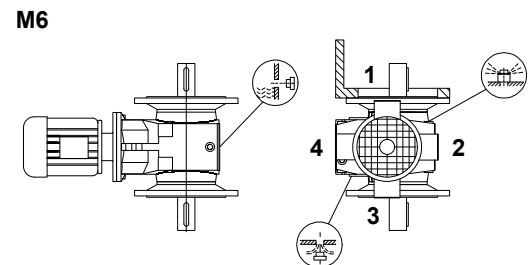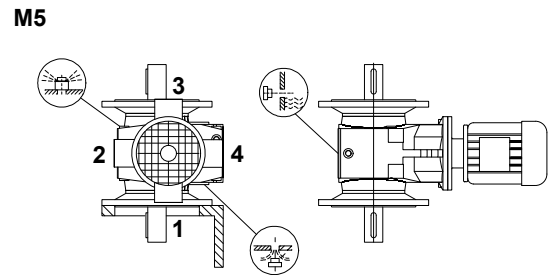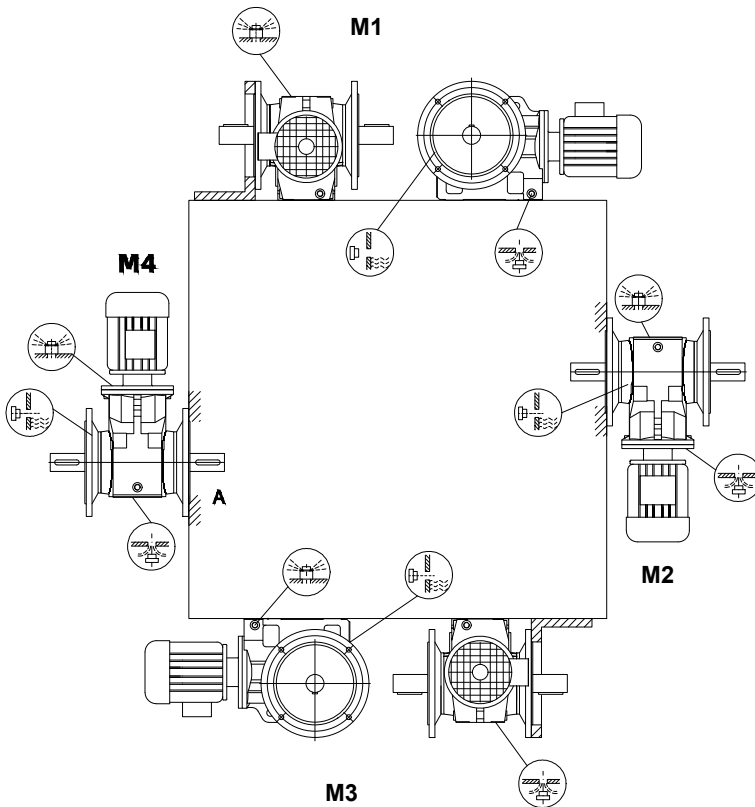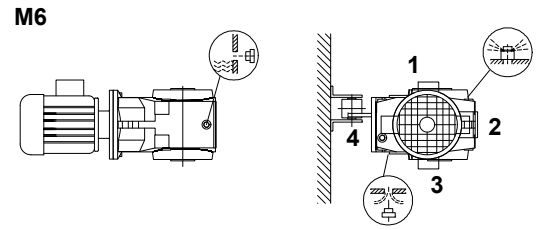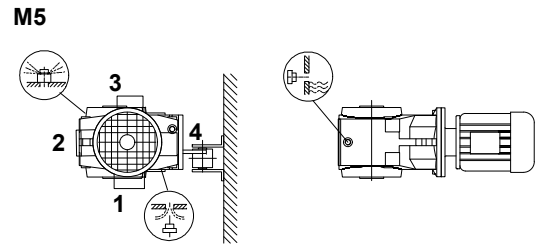





**TR MONTAJ POZİSYONU**

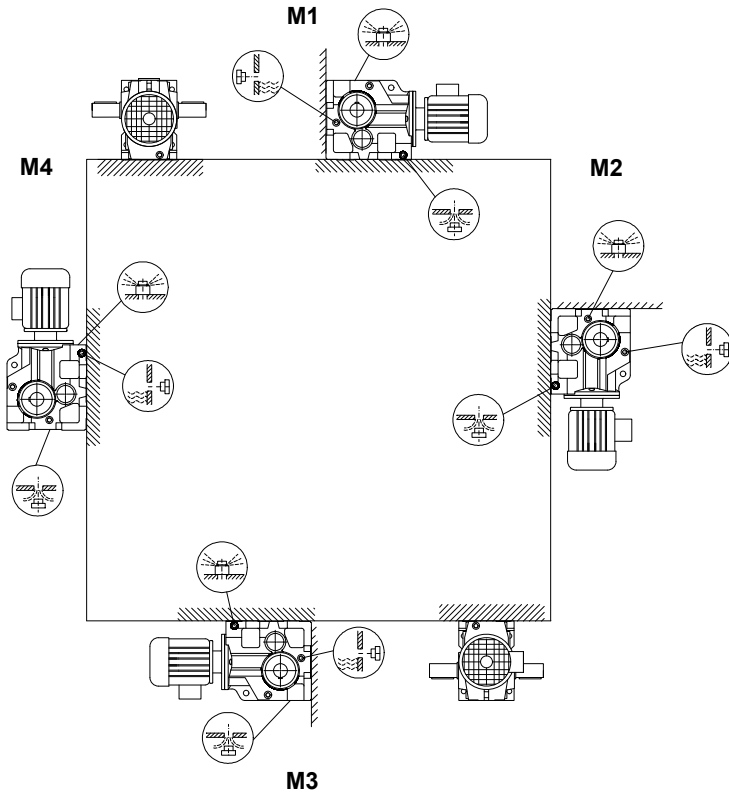

**EN MOUNTING POSITION**

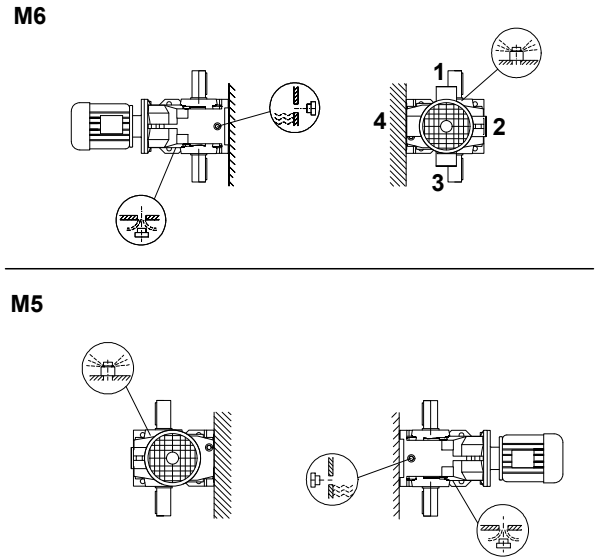





**TR** SİPARİŞ ŞEKLİ

**EN** ORDER TYPE



Motorlu Sipariş Örneği / Order Type with Motor Example

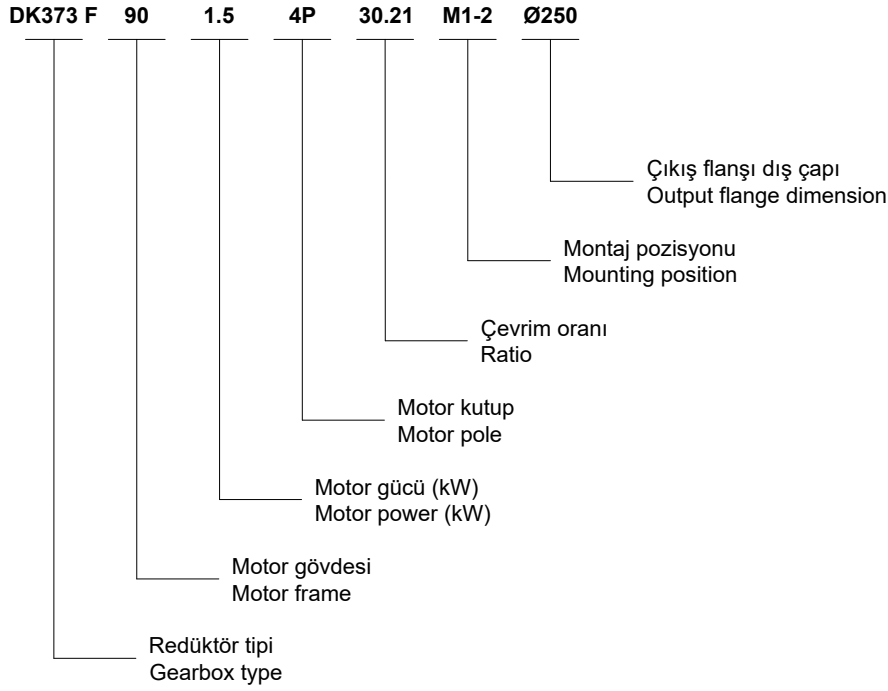

Motorsuz Sipariş Örneği / Order Type Without Motor Example

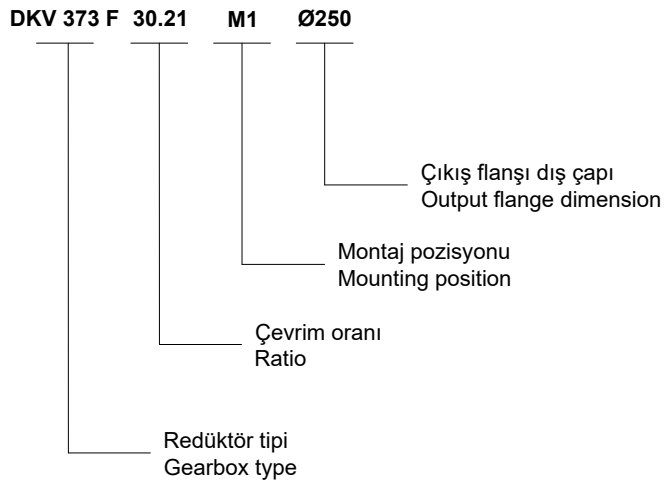


## GÜÇ DEVİR TABLOLARI GEARED PERFORMANCE TABLES

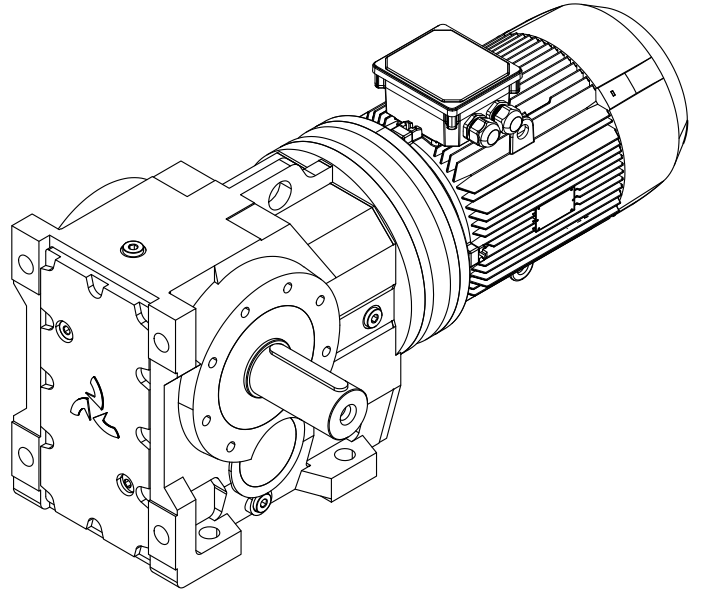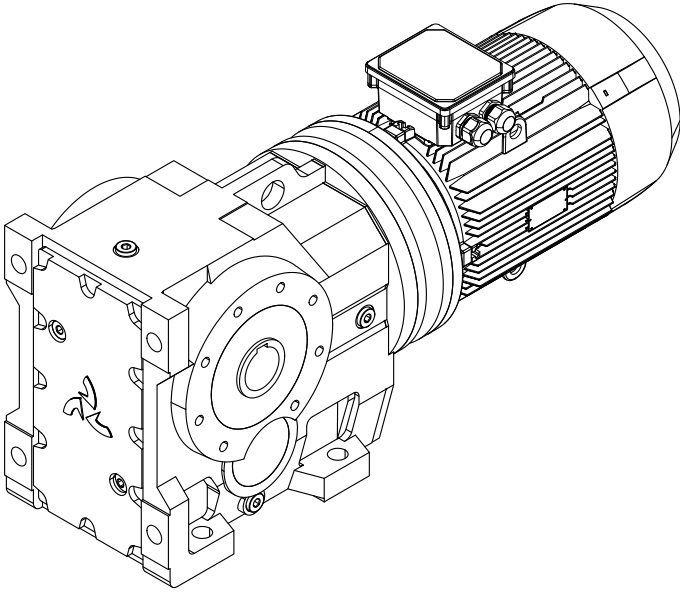

# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.12</b>	0.10	9590	0.85	14311	<b>DK 776 63M4A</b>
	0.11	8060	1.00	12211	
	0.13	6930	1.15	10677	
	0.14	6280	1.25	9524	
	0.17	5410	1.50	8328	
	0.19	4720	1.70	7270	
	0.22	3760	2.1	6184	
	0.24	3320	2.4	5662	
	0.27	3020	2.7	5138	<b>DK 476 63M4A</b>
	0.32	2700	3.0	4359	
	0.51	1790	0.85	2717	<b>DK 475 63M4A</b>
	0.58	1510	1.05	2370	
	0.67	1380	1.10	2050	
	0.78	1180	1.30	1772	
	0.91	1010	1.55	1514	
	0.99	920	1.70	1388	
	1.1	810	1.90	1218	
	1.3	710	2.2	1053	
	1.5	620	2.5	924	
	1.7	550	2.8	815	
	2.0	440	3.5	709	
	2.2	385	4.0	622	<b>DK 375 63M4A</b>
	1.0	930	0.90	1351	
	1.2	795	1.05	1171	
	1.3	695	1.20	1034	
	1.5	585	1.40	903	
	1.7	545	1.50	793	
	2.0	440	1.85	697	
	2.2	390	2.1	613	
	2.5	340	2.4	542	
	2.9	315	2.6	471	
	3.3	265	3.1	420	
	3.8	235	3.5	361	
	4.3	210	3.9	323	
	4.9	176	4.7	279	
	5.6	155	5.3	246	
	6.3	134	6.1	217	<b>DK 373 63M6B</b>
	6.2	184	4.4	144.79	
	2.2	430	0.95	639	<b>DK 275 63M4A</b>
	2.5	370	1.10	552	
	2.8	315	1.25	495	
	3.2	280	1.45	426	
	3.7	235	1.70	375	
	4.2	215	1.85	327	
	4.8	189	2.1	289	
	6.8	168	2.4	131.87	<b>DK 273 63M6B</b>
	7.4	155	2.6	121.48	
8.6	133	3.0	104.37		
10	110	3.7	131.87	<b>DK 273 63M4A</b>	
11	101	4.0	121.48		
8.5	136	106.38	1.50	<b>DK 173 63M6B</b>	
9.2	125	97.81	1.60		
11	107	83.69	1.90		
12	92	72.54	2.2		
13	88	2.3	106.38	<b>DK 173 63M4A</b>	
14	81	2.5	97.81		
16	70	2.9	83.69		
19	60	3.3	72.54		
20	56	3.5	67.80		
24	49	4.1	58.60		
28	41	4.8	49.79		
31	37	5.4	44.46		
36	32	6.3	37.97		
39	30	6.8	35.57		
46	25	8.0	29.96		
48	24	8.4	28.83		
55	21	9.6	24.99		
59	19	10	23.36		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.12</b>	68	17	11	20.19	<b>DK 173 63M4A</b>
	80	14	13	17.15	
	90	13	14	15.32	
	105	11	15	13.08	
	114	10	16	12.14	
<b>0.18</b>	0.16	8990	0.90	8328	<b>DK 776 63M4B</b>
	0.18	7850	1.00	7270	
	0.21	6420	1.25	6184	
	0.23	5760	1.40	5662	
	0.26	5230	1.55	5138	
	0.30	4570	1.75	4359	
	0.35	4000	2.0	3810	
	0.39	3440	2.3	3358	
	0.44	3090	2.6	2977	
	0.51	2700	3.0	2599	
	0.58	2340	3.4	2286	
	0.87	1670	0.95	1514	<b>DK 475 63M4B</b>
	0.95	1530	1.00	1388	
	1.1	1340	1.15	1218	
	1.2	1170	1.35	1053	
	1.4	1030	1.50	924	
	1.6	910	1.70	815	
	1.9	750	2.1	709	
	2.1	655	2.4	622	
	2.4	590	2.6	552	
	2.7	515	3.0	485	
	3.1	455	3.4	428	
	3.6	400	3.9	367	
	1.5	980	0.85	903	<b>DK 375 63M4B</b>
	1.7	890	0.90	793	
	1.9	745	1.10	697	
	2.2	655	1.25	613	
	2.4	580	1.40	542	
	2.8	520	1.60	471	
	3.2	445	1.85	420	
	3.7	395	2.1	361	
	4.1	350	2.3	323	
	4.7	295	2.8	279	
	6.0	285	2.9	144.79	<b>DK 373 71M6A</b>
	7.0	145	3.4	123.54	
	8.1	215	3.8	108.03	
	8.5	205	4.0	102.62	
	9.1	189	4.3	144.79	<b>DK 373 63M4B</b>
	11	161	5.1	123.54	
	12	141	5.8	108.03	
	3.5	400	1.00	375	<b>DK 275 63M4B</b>
	4.0	360	1.10	327	
	4.6	315	1.25	289	
	5.2	275	1.45	256	
	5.9	245	1.65	225	
	6.7	210	1.90	198	
	7.7	183	2.2	171	
	8.6	164	2.4	153	
	10	142	2.8	131	
	6.6	260	1.55	131.87	
	7.2	240	1.65	121.48	
	8.3	205	1.95	104.37	
	9.6	180	2.2	90.86	
	10	168	2.4	85.12	
	10	172	2.3	131.87	<b>DK 273 63M4B</b>
	11	158	2.5	121.48	
	13	136	2.9	104.37	
	15	118	3.4	90.86	
	16	111	3.6	85.12	
	8.2	210	0.95	106.38	
	8.9	193	1.05	97.81	
	10	165	1.20	83.69	
	12	143	1.40	72.54	



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.18</b>	12	139	1.45	106.38	<b>DK 173 63M4B</b>
	14	127	1.55	97.81	
	16	109	1.85	83.69	
	18	95	2.1	72.54	
	19	88	2.3	67.80	
	23	76	2.6	58.60	
	27	65	3.1	49.79	
	30	58	3.5	44.46	
	35	49	4.1	37.97	
	37	46	4.3	35.57	
	44	39	5.1	29.96	
	46	38	5.3	28.83	
	53	33	6.2	24.99	
	57	30	6.4	23.36	
	65	26	7.0	20.19	
	77	22	8.1	17.15	
	86	20	8.8	15.32	
101	17	9.7	13.08		
109	16	10	12.14		
126	14	12	10.49		
148	12	14	8.91		
166	10	15	7.96		
<b>0.25</b>	0.21	9440	0.85	6184	<b>DK 776 71M4A</b>
	0.23	8520	0.95	5662	
	0.25	7730	1.05	5138	
	0.30	6700	1.20	4359	
	0.34	5850	1.35	3810	
	0.39	5070	1.60	3358	
	0.44	4540	1.75	2977	
	0.50	3970	2.0	2599	
	0.57	3450	2.3	2286	
	0.67	2930	2.7	1939	
	0.76	2640	3.0	1713	<b>DK 775 71M4A</b>
	0.84	2390	3.3	1554	
	0.97	2060	3.9	1336	
	1.2	1690	0.90	1053	<b>DK 475 71M4A</b>
	1.4	1480	1.05	924	
	1.6	1310	1.20	815	
	1.8	1100	1.40	709	
	2.1	960	1.60	622	
	2.3	860	1.80	552	
	2.7	755	2.0	485	
	3.0	665	2.3	428	
	3.5	580	2.7	367	
	4.0	515	3.0	328	
	4.5	460	3.4	290	
	5.2	395	3.9	252	
	5.9	345	4.5	221	
	6.7	305	5.1	195	
	7.4	270	5.7	175	
	4.6	520	2.8	192.18	<b>DK 473 71M6B</b>
	4.9	485	3.0	179.37	
	5.7	420	3.7	154.02	
	6.5	365	4.2	135.28	
	2.1	960	0.85	613	<b>DK 375 71M4A</b>
2.4	850	0.95	542		
2.8	755	1.10	471		
3.1	655	1.25	420		
3.6	575	1.45	361		
4.0	510	1.60	323		
4.7	430	1.90	279		
5.3	385	2.1	246		
6.0	335	2.4	217		
6.1	395	2.1	144.79	<b>DK 373 71M6B</b>	
7.1	335	2.5	123.54		
8.1	295	2.8	108.03		
8.6	280	3.0	102.62		
9.0	265	3.1	144.79	<b>DK 373 71M4A</b>	
11	225	3.6	123.54		
12	198	4.1	108.03		
13	189	4.3	102.62		





# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
0.25	6.7	360	1.10	131.87	DK 273 71M6B
	7.2	330	1.20	121.48	
	8.4	285	1.40	104.37	
	9.7	245	1.60	90.86	
	10	230	1.75	85.12	
	9.9	240	1.65	131.87	DK 273 71M4A
	11	225	1.80	121.48	
	12	192	2.1	104.37	
	14	167	2.4	90.86	
	15	156	2.6	85.12	
	11	225	0.90	83.69	DK 173 71M6B
	12	197	1.00	72.54	
	13	184	1.10	67.80	
	15	159	1.25	58.60	
	18	135	1.50	49.79	
	12	195	1.00	106.38	DK 173 71M4A
	13	180	1.10	97.81	
	16	154	1.30	83.69	
	18	133	1.50	72.54	
	19	125	1.60	67.80	
	22	108	1.85	58.60	
	26	91	2.2	49.79	
	29	82	2.5	44.46	
	34	70	2.9	37.97	
	37	65	3.1	35.57	
	43	55	3.6	29.96	
	45	53	3.8	28.83	
	52	46	4.4	24.99	
	56	43	4.6	23.36	
	64	37	5.0	20.19	
	76	32	5.7	17.15	
	85	28	6.2	15.32	
	99	24	6.9	13.08	
	107	22	7.2	12.14	
	124	19	8.3	10.49	
146	16	9.8	8.91		
163	15	11	7.96		
191	13	12	6.80		
204	12	12	6.37		
0.37	0.36	8380	0.95	3810	DK 776 71M4B
	0.41	7300	1.10	3358	
	0.46	6510	1.25	2977	
	0.53	5690	1.40	2599	
	0.60	4970	1.60	2286	
	0.71	4210	1.90	1939	
	0.81	3790	2.1	1713	DK 775 71M4B
	0.89	3440	2.3	1554	
	1.0	2950	2.7	1336	
	1.2	2580	3.1	1166	
	4.6	775	3.5	197.37	DK 573 80M6A
	5.2	685	4.0	174.19	
	1.7	1860	0.85	815	DK 475 71M4B
	2.0	1580	1.00	709	
	2.2	1380	1.10	622	
	2.5	1230	1.25	552	
	2.8	1080	1.45	485	
	3.2	950	1.60	428	
	3.8	830	1.85	367	
	4.2	735	2.1	328	
	4.8	655	2.4	290	
	5.5	565	2.8	252	
	6.2	495	3.1	221	
	7.1	435	3.5	195	
	7.9	390	4.0	175	
	9.0	340	4.5	154	
	5.8	605	154.02	2.6	DK 473 80M6A
6.7	530	135.28	2.9		
7.0	505	128.52	3.1		
7.9	445	113.56	3.5		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.37</b>	7.2	490	192.18	3.0	<b>DK 473 71M4B</b>
	7.7	460	179.37	3.2	
	9.0	395	154.02	3.9	
	3.3	940	0.90	420	<b>DK 375 71M4B</b>
	3.8	820	1.00	361	
	4.3	725	1.15	323	
	4.9	625	1.30	279	
	5.6	550	1.50	246	
	6.3	485	1.70	217	
	7.2	430	1.90	191	
	8.3	370	2.2	166	
	9.6	320	2.5	144	
	11	275	3.0	122	
	7.3	485	1.70	123.54	<b>DK 373 80M6A</b>
	8.3	425	1.95	108.03	
	8.8	405	2.0	102.62	
	10	355	2.3	90.04	
	9.5	370	2.2	144.79	<b>DK 373 71M4B</b>
	11	315	2.6	123.54	
	13	275	3.0	108.03	
	15	230	3.6	90.04	
	18	196	4.2	76.37	
	8.6	410	1.00	104.37	<b>DK 273 80M6A</b>
	9.9	355	1.10	90.86	
	11	335	1.20	85.12	
	12	295	1.35	75.20	
	10	340	1.20	131.87	<b>DK 273 71M4B</b>
	11	310	1.30	121.48	
	13	265	1.50	104.37	
	15	235	1.70	90.86	
	16	220	1.85	85.12	
	18	193	2.1	75.20	
	20	179	2.2	69.84	
	22	162	2.5	63.30	
	14	250	0.80	97.81	<b>DK 173 71M4B</b>
	16	215	0.95	83.69	
	19	186	1.10	72.54	
	20	174	1.15	67.80	
	24	150	1.35	58.60	
	28	128	1.55	49.79	
	31	114	1.75	44.46	
	36	97	2.1	37.97	
	39	91	2.2	35.57	
	46	77	2.6	29.96	
	48	74	2.7	28.83	
	55	64	3.1	24.99	
	59	60	3.3	23.36	
	68	52	3.6	20.19	
80	44	4.1	17.15		
90	39	4.5	15.32		
105	34	4.9	13.08		
114	31	5.1	12.14		
132	27	5.9	10.49		
155	23	7.0	8.91		
173	20	7.6	7.96		
203	17	8.6	6.80		
217	16	8.9	6.37		
257	14	10	5.36		
<b>0.55</b>	0.46	10100	0.80	2977	<b>DK 776 80M4A</b>
	0.52	8770	0.90	2599	
	0.59	7690	1.05	2286	
	0.70	6520	1.25	1939	
	0.79	5850	1.35	1713	<b>DK 775 80M4A</b>
	0.87	5310	1.50	1554	
	1.0	4570	1.75	1336	
	1.2	3990	2.0	1166	
	1.3	3450	2.3	1030	
	1.5	3000	2.7	904	
	1.7	2700	3.0	793	



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.55</b>	2.0	2360	3.4	696	<b>DK 775 80M4A</b>
	2.2	2050	3.9	615	
	4.6	1150	2.3	197.37	<b>DK 573 80M6B</b>
	5.2	1020	2.7	174.19	
	5.5	960	2.8	164.34	
	6.1	860	3.1	147.33	
	2.5	1900	0.80	552	
	2.8	1670	0.95	485	
	3.2	1470	1.05	428	
	3.7	1270	1.20	367	
	4.2	1130	1.35	328	
	4.7	1000	1.55	290	
	5.4	870	1.80	252	
	6.2	760	2.0	221	
	7.0	670	2.3	195	
	7.8	600	2.6	175	
	8.8	530	2.9	154	
	5.8	900	1.70	154.02	<b>DK 473 80M6B</b>
	6.7	790	1.95	135.28	
	7.0	750	2.1	128.52	
	7.9	665	2.3	113.56	
	8.8	595	2.6	154.02	<b>DK 473 80M4A</b>
	10	520	3.0	135.28	
	11	495	3.1	128.52	
	12	440	3.5	113.56	
	14	375	4.1	97.05	
	4.9	960	0.85	279	<b>DK 375 80M4A</b>
	5.5	840	0.95	246	
	6.2	745	1.10	217	
	7.1	660	1.25	191	
	8.2	570	1.45	166	
	9.4	495	1.65	144	
	11	420	1.95	122	
	7.3	720	1.15	123.54	<b>DK 373 80M6B</b>
	8.3	630	1.30	108.03	
	8.8	600	1.35	102.62	
	10	525	1.55	90.04	
	12	445	1.85	76.37	
	11	475	1.70	123.54	<b>DK 373 80M4A</b>
	13	415	1.95	108.03	
	15	350	2.4	90.04	
	18	295	2.8	76.37	
	13	405	1.00	104.37	<b>DK 273 80M4A</b>
	15	350	1.15	90.86	
	16	330	1.20	85.12	
	18	290	1.40	75.20	
	19	270	1.50	69.84	
	21	245	1.65	63.30	
24	220	1.80	56.83		
28	189	2.1	48.95		
30	178	2.2	46.04		
23	225	0.90	58.60	<b>DK 173 80M4A</b>	
27	192	1.05	49.79		
31	172	1.15	44.46		
36	147	1.35	37.97		
38	137	1.45	35.57		
45	116	1.75	29.96		
47	111	1.80	28.83		
54	97	2.1	24.99		
58	90	2.2	23.36		
67	78	2.4	20.19		
79	66	2.7	17.15		
89	59	3.0	15.32		
104	51	3.3	13.08		
112	47	3.4	12.14		
130	41	4.0	10.49		
153	34	4.7	8.91		
171	31	5.1	7.96		
200	26	5.7	6.80		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
<b>0.55</b>	214	25	5.9	6.37	<b>DK 173 80M4A</b>
	254	21	6.8	5.36	
<b>0.75</b>	0.81	7960	1.00	1713	<b>DK 775 80M4B</b>
	0.89	7230	1.10	1554	
	1.0	6210	1.30	1336	
	1.2	5420	1.50	1166	
	1.3	4710	1.70	1030	
	1.5	4120	1.95	904	
	1.7	3680	2.2	793	
	2.0	3210	2.5	696	
	2.2	2800	2.8	615	
	5.2	1390	1.95	174.19	
	5.5	1310	2.1	164.34	
	6.1	1170	2.3	147.33	
	7.1	1010	2.7	126.91	
	7.0	1020	2.6	197.37	<b>DK 573 80M4B</b>
	7.9	900	3.0	174.19	
	8.4	850	3.2	164.34	
	9.4	765	3.5	147.32	
	3.8	1720	0.90	367	
	4.2	1540	1.00	328	
	4.8	1360	1.15	290	
	5.5	1180	1.30	252	
	6.2	1030	1.50	221	
	6.7	1080	1.45	135.28	<b>DK 473 90S6A</b>
	7.0	1020	1.50	128.52	
	7.9	900	1.70	113.56	
	9.3	770	2.0	97.05	
	10	710	2.2	88.97	
	9.0	800	1.95	154.02	<b>DK 473 80M4B</b>
	10	700	2.2	135.28	
	11	665	2.3	128.52	
	12	590	2.6	113.56	
	14	505	3.1	97.05	
	11	640	1.30	123.54	<b>DK 373 80M4B</b>
	13	560	1.45	108.03	
	15	465	1.75	90.04	
	18	395	2.1	76.37	
	20	360	2.3	68.95	
	23	315	2.6	60.66	
	24	295	2.8	57.28	
	18	390	1.00	75.20	<b>DK 273 80M4B</b>
	20	365	1.10	69.84	
	22	330	1.20	63.30	
24	295	1.35	56.83		
28	255	1.55	48.95		
30	240	1.65	46.04		
35	205	1.95	39.61		
39	184	2.2	35.39		
44	162	2.5	31.30		
31	230	0.85	44.46	<b>DK 173 80M4B</b>	
36	197	1.00	37.97		
39	185	1.10	35.57		
46	156	1.30	29.96		
48	150	1.35	28.83		
55	130	1.55	24.99		
59	121	1.60	23.36		
68	105	1.75	20.19		
80	89	2.0	17.15		
90	80	2.2	15.32		
105	68	2.4	13.08		
114	63	2.5	12.14		
132	54	2.9	10.49		
155	46	3.5	8.91		
173	41	3.8	7.96		
203	35	4.2	6.80		
217	33	4.4	6.37		
257	28	5.0	5.36		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
1.1	1.2	7920	1.00	1166	DK 775 90S4A
	1.4	6920	1.15	1030	
	1.5	6050	1.30	904	
	1.8	5380	1.50	793	
	2.0	4700	1.70	696	
	2.3	4120	1.95	615	
	2.7	3500	2.3	522	
	3.0	3080	2.6	461	
	3.4	2720	2.9	408	
	3.8	2450	3.3	364	
	4.4	2140	3.7	318	
	5.2	2010	2.1	176.05	DK 673 90L6B
	6.0	1750	2.5	153.21	
	6.6	1600	2.7	140.28	
	7.4	1420	3.0	123.93	
	7.9	1320	3.3	176.05	DK 673 90S4A
	9.1	1150	3.7	153.21	
	10	1050	4.1	140.28	
	5.3	1990	1.35	174.19	DK 573 90L6B
	5.6	1880	1.45	164.34	
	6.2	1680	1.60	147.33	
	7.2	1450	1.85	126.91	
	8.0	1310	2.1	174.19	DK 573 90S4A
	8.5	1230	2.2	164.34	
	9.5	1110	2.4	147.33	
	11	950	2.8	126.91	
	12	870	3.1	115.82	
	6.8	1540	1.00	135.28	DK 473 90L6B
	7.2	1470	1.05	128.52	
	8.1	1300	1.20	113.56	
	9.5	1110	1.40	97.05	
	10	1020	1.55	135.28	DK 473 90S4A
	11	960	1.60	128.52	
	12	850	1.80	113.56	
	14	730	2.1	97.05	
	16	670	2.3	88.97	
	18	585	2.7	78.07	
	19	555	2.8	73.99	
	13	810	1.00	108.03	DK 373 90S4A
	14	770	1.05	102.62	
	16	675	1.20	90.04	
	18	575	1.45	76.37	
	20	515	1.60	68.95	
	23	455	1.80	60.66	
24	430	1.90	57.28		
29	365	2.2	48.77		
32	335	2.5	44.32		
36	290	2.8	38.39		
25	425	0.95	56.83	DK 273 90S4A	
29	265	1.10	48.95		
30	345	1.15	46.04		
35	295	1.35	39.61		
40	265	1.50	35.39		
45	235	1.70	31.30		
48	220	1.80	29.32		
54	194	2.1	25.91		
64	164	2.4	21.81		
72	147	2.7	19.58		
47	225	0.90	29.96	DK 173 90S4A	
56	188	1.05	24.99		
60	175	1.10	23.36		
69	152	1.20	20.19		
82	129	1.40	17.15		
91	115	1.50	15.32		
107	98	1.70	13.08		
115	91	1.75	12.14		
133	79	2.0	10.49		
157	67	2.4	8.91		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type	
<b>1.1</b>	176	60	2.6	7.96	<b>DK 173 90S4A</b>	
	206	51	2.9	6.80		
	220	48	3.0	6.37		
	261	40	3.5	5.36		
<b>1.5</b>	1.4	9460	0.85	1030	<b>DK 775 90L4B</b>	
	1.6	8280	0.95	904		
	1.8	7330	1.10	793		
	2.0	6420	1.25	696		
	2.3	5640	1.40	615		
	2.7	4780	1.65	522		
	3.1	4210	1.90	461		
	3.5	3720	2.2	408		
	3.9	3350	2.4	364	<b>DK 673 100L6B</b>	
	4.4	2920	2.7	318		
	5.2	2740	1.55	176.05		
	6.0	2390	1.80	153.21		
	6.6	2180	1.95	140.28	<b>DK 673 90L4B</b>	
	7.4	1930	2.2	123.93		
	8.0	1790	2.4	176.05		
	9.2	1560	2.8	153.21		
	10	1430	3.0	140.28	<b>DK 573 100L6B</b>	
	11	1260	3.4	123.93		
	6.2	2290	1.20	147.33		
	7.2	1980	1.35	126.91		
	7.9	1800	1.50	115.82	<b>DK 573 90L4B</b>	
	9.0	1600	1.70	102.71		
	8.1	1770	1.55	174.19		
	8.6	1670	1.60	164.34		
	9.6	1500	1.80	147.33	<b>DK 473 100L6B</b>	
	11	1290	2.1	126.91		
	12	1180	2.3	115.82		
	14	1040	2.6	102.71		
	16	880	3.1	86.34		
	8.1	1770	0.90	113.56		
	9.5	1510	1.05	97.05		<b>DK 473 90L4B</b>
	10	1390	1.10	88.97		
	12	1220	1.30	78.07		
	10	1370	1.15	135.28		
	11	1310	1.20	128.52	<b>DK 473 100L6B</b>	
	12	1150	1.35	113.56		
15	990	1.55	97.05			
16	900	1.70	88.97			
18	795	1.95	78.07			
19	750	2.1	73.99			
22	660	2.4	64.76			
24	595	2.6	58.34			
28	520	3.0	51.18			
31	460	3.4	45.16			
35	405	3.8	40.04			
16	910	0.90	90.04	<b>DK 373 90L4B</b>		
18	775	1.05	76.37			
20	700	1.15	68.95			
23	615	1.35	60.66			
25	580	1.40	57.28			
29	495	1.65	48.77			
32	450	1.80	44.32			
37	390	2.0	38.39			
40	360	2.3	35.61			
47	305	2.7	30.21			
52	275	3.0	27.27			
59	245	3.3	23.99			
36	400	1.00	39.61	<b>DK 273 90L4B</b>		
40	360	1.10	35.39			
45	320	1.25	31.30			
48	300	1.35	29.32			
54	265	1.50	25.91			
65	220	1.80	21.81			
72	199	2.0	19.58			
84	171	2.2	16.86			
89	161	2.4	15.86			



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type	
<b>1.5</b>	103	139	2.6	13.65	<b>DK 273 90L4B</b>	
	116	124	2.8	12.19		
	120	120	2.3	11.77		
	60	235	0.80	23.36	<b>DK 173 90L4B</b>	
	70	205	0.90	20.19		
	82	174	1.05	17.15		
	92	156	1.10	15.32		
	108	133	1.25	13.08		
	116	123	1.30	12.14		
	134	107	1.50	10.49		
	158	91	1.75	8.91		
	177	81	1.90	7.96		
	207	69	2.2	6.80		
	221	65	2.2	6.37		
	263	55	2.6	5.36		
	<b>2.2</b>	2.3	8340	0.95	615	<b>DK 775 100L4A</b>
		2.7	7070	1.15	522	
		3.1	6230	1.30	461	
		3.5	5520	1.45	408	
3.9		4940	1.60	364		
4.4		4320	1.85	318		
4.9		3890	2.1	286		
5.6		3410	2.3	251		
6.1		3420	1.25	153.21	<b>DK 673 112M6A</b>	
6.7		3140	1.35	140.28		
7.6		2770	1.55	123.93		
8.9		2350	1.85	105.13		
8.0		2620	1.65	176.05	<b>DK 673 100L4A</b>	
9.2		2280	1.90	153.21		
10		2090	2.1	140.28		
11		1850	2.3	123.93		
13		1570	2.8	105.13		
15		1440	3.0	96.80		
9.6		2200	1.25	147.33	<b>DK 573 100L4A</b>	
11		1890	1.45	126.91		
12		1730	1.55	115.82		
14		1530	1.75	102.71		
16		1290	2.1	86.34		
18		1180	2.3	79.34		
20		1050	2.6	70.46		
22		940	2.9	63.00		
12		1690	0.90	113.56	<b>DK 473 100L4A</b>	
15		1450	1.05	97.05		
16		1330	1.15	88.97		
18		1160	1.35	78.07		
19		1100	1.40	73.99		
22		960	1.60	64.76		
24		870	1.80	58.34		
28		765	2.0	51.18		
31		675	2.3	45.16		
35		595	2.6	40.04		
40		525	3.0	35.19		
46		460	3.4	30.88		
48		435	3.6	29.26		
55		380	4.1	25.61		
23		900	0.90	60.66	<b>DK 373 100L4A</b>	
25		850	0.95	57.28		
29	725	1.15	48.77			
32	660	1.25	44.32			
37	570	1.40	38.39			
40	530	1.55	35.61			
47	450	1.80	30.21			
52	405	2.0	27.27			
59	360	2.2	23.99			
62	340	2.3	22.66			
73	285	2.6	19.29			
80	260	2.8	17.53			
93	225	3.1	15.19			
107	197	3.4	13.22			
113	186	2.8	12.48			



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type		
2.2	133	158	3.2	10.63	DK 373 100L4A		
	146	144	3.3	9.66			
	169	125	3.5	8.37			
	194	109	3.9	7.28			
	2.2	54	385	1.05	25.91	DK 273 100L4A	
		65	325	1.25	21.81		
		72	290	1.35	19.58		
		84	250	1.50	16.86		
		89	235	1.60	15.86		
		103	205	1.75	13.65		
		116	182	1.95	12.19		
		120	175	1.60	11.77		
133		157	1.80	10.56			
155		136	2.1	9.10			
2.2	108	195	0.85	13.08	DK 173 100L4A		
	134	156	1.00	10.49			
	158	133	1.20	8.91			
	177	119	1.30	7.96			
	207	101	1.50	6.80			
	221	95	1.55	6.37			
	263	80	1.75	5.36			
	3.0	3.0	8610	0.95		461	DK 775 100L4B
		3.4	7620	1.05		408	
		3.8	6820	1.15		364	
4.4		5960	1.35	318			
4.9		5370	1.50	286			
5.6		4700	1.70	251			
6.3		4150	1.95	222			
7.1		3670	2.2	196			
8.1		3250	2.2	174			
9.1		2880	2.5	154			
10		2610	2.8	140			
3.0		6.6	4370	1.85	143.47	DK 773 132S6A	
		7.7	3700	2.2	121.46		
		8.4	3430	2.3	112.41		
		9.3	3070	2.6	100.75		
3.0		9.8	2940	2.7	143.47	DK 773 100L4B	
		12	2490	3.2	121.46		
3.0		7.6	3780	1.15	123.93	DK 673 132S6A	
		8.9	3200	1.35	105.13		
		9.7	2950	1.45	96.80		
		11	2640	1.65	86.52		
		3.0	7.9	3600	1.20		176.05
9.1			3140	1.35	153.21		
10			2870	1.50	140.28		
11			2540	1.70	123.93		
13			2150	2.0	105.13		
14			1980	2.2	96.80		
16			1770	2.4	86.52		
18			1590	2.7	77.89		
20			1440	3.0	70.54		
22	1280		3.4	62.55			
25	1160	3.7	56.55				
3.0	9.5	3010	0.90	147.33	DK 573 100L4B		
	11	2600	1.05	126.91			
	12	2370	1.15	115.82			
	14	2100	1.30	102.71			
	16	1770	1.55	86.34			
	18	1620	1.65	79.34			
	20	1440	1.85	70.46			
	22	1290	2.1	63.00			
	25	1160	2.3	56.64			
	28	1010	2.7	49.16			
32	900	2.9	44.02				
38	745	3.3	36.52				
3.0	16	1820	0.85	88.97	DK 473 100L4B		
	18	1600	0.95	78.07			
	19	1510	1.0	73.99			
	22	1330	1.15	64.76			





# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ ( $\text{min}^{-1}$ )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
3.0	24	1190	1.3	58.34	DK 473 100L4B
	27	1050	1.5	51.18	
	31	920	1.7	45.16	
	35	820	1.9	40.04	
	40	720	2.2	35.19	
	45	630	2.5	30.88	
	32	910	0.90	44.32	DK 373 100L4B
	36	785	1.0	38.39	
	39	730	1.15	35.61	
	46	620	1.35	30.21	
	51	560	1.45	27.27	
	58	490	1.65	23.99	
	62	465	1.70	22.66	
	73	395	1.95	19.29	
	80	360	2.1	17.53	
	92	310	2.2	15.19	
	106	270	2.5	13.22	
	112	255	2.1	12.48	
	132	220	2.3	10.63	
	145	198	2.4	9.66	
	72	400	1.0	19.58	DK 273 100L4B
	83	345	1.10	16.86	
	88	325	1.15	15.86	
	103	280	1.30	13.65	
	115	250	1.40	12.19	
	119	240	1.15	11.77	
	133	215	1.30	10.56	
	154	186	1.50	9.10	
	164	175	1.55	8.56	
	190	151	1.65	7.36	
	213	135	1.80	6.58	
	241	119	1.95	5.81	
	157	182	0.90	8.91	DK 173 100L4B
	176	163	0.95	7.96	
	206	139	1.10	6.80	
	220	130	1.10	6.37	
261	110	1.30	5.36		
4.0	3.9	8990	0.90	364	DK 775 112M4A
	4.5	7860	1.00	318	
	5.0	7080	1.15	286	
	5.7	6200	1.30	251	
	6.4	5470	1.45	222	
	7.2	4840	1.65	196	
	8.2	4290	1.70	174	
	9.2	3800	1.90	154	
	10	3440	2.1	140	
	6.7	5710	1.40	143.47	DK 773 132M6B
	7.9	4830	1.65	121.46	
	9.5	4010	2.0	112.41	
	8.5	4470	1.80	100.75	
	11	3620	2.2	90.96	
	9.9	3860	2.1	143.47	DK 773 112M4A
	12	3270	2.5	121.46	
	13	3020	2.7	112.41	
	14	2710	3.0	100.75	
	16	2450	3.3	90.96	
	17	2220	3.6	82.61	
	19	1970	4.1	73.30	
	9.3	4120	1.05	153.21	DK 673 112M4A
	10	3770	1.15	140.28	
	11	3330	1.30	123.93	
14	2830	1.50	105.13		
15	2600	1.65	96.80		
16	2330	1.85	86.52		
18	2100	2.0	77.89		
20	1900	2.3	70.54		
12	3120	0.85	115.82	DK 573 112M4A	
14	2760	1.00	102.71		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
4.0	16	2320	1.15	86.34	DK 573 112M4A
	18	2130	1.25	79.34	
	20	1900	1.40	70.46	
	23	1690	1.60	63.00	
	25	1520	1.75	56.64	
	29	1320	2.0	49.16	
	32	1180	2.2	44.02	
	39	980	2.5	36.52	
	22	1740	0.90	64.76	DK 473 112M4A
	24	1570	1.00	58.34	
	28	1380	1.15	51.18	
	31	1210	1.30	45.16	
	35	1080	1.45	40.04	
	37	1030	1.45	38.39	
	40	950	1.65	35.19	
	46	830	1.85	30.88	
	49	785	1.95	29.26	
	55	690	2.2	25.61	
	62	620	2.5	23.08	
	70	545	2.8	20.24	
	47	810	1.00	30.21	DK 373 112M4A
	52	735	1.10	27.27	
	59	645	1.25	23.99	
	63	610	1.30	22.66	
	74	520	1.45	19.29	
	81	470	1.55	17.53	
	94	410	1.70	15.19	
107	355	1.90	13.22		
114	335	1.60	12.48		
134	285	1.75	10.63		
147	260	1.85	9.66		
170	225	1.95	8.37		
195	196	2.1	7.28		
5.5	6.4	7490	1.05	222	DK 775 132S4A
	7.3	6640	1.20	196	
	8.2	5870	1.25	174	
	9.3	5200	1.40	154	
	10	4720	1.55	140	
	10	5270	1.50	143.47	DK 773 132S4A
	12	4460	1.80	121.46	
	13	4130	1.95	112.41	
	14	3700	2.2	100.75	
	16	3340	2.4	90.96	
	17	3030	2.6	82.61	
	12	4550	0.95	123.93	DK 673 132S4A
	14	3860	1.10	105.13	
	15	3560	1.20	93.80	
	17	3180	1.35	86.52	
	18	2860	1.50	77.89	
	20	2590	1.65	70.54	
	23	2300	1.85	62.55	
	25	2080	2.1	56.55	
	30	1760	2.4	47.93	
	17	3170	0.85	86.34	DK 573 132S4A
	18	2910	0.95	79.34	
	20	2590	1.05	70.46	
	23	2310	1.15	63.00	
	25	2080	1.30	56.64	
	29	1810	1.50	49.16	
	32	1620	1.60	44.02	
39	1340	1.85	36.52		
46	1150	2.3	31.38		
51	1020	2.5	27.87		
32	1660	0.95	45.16	DK 473 132S4A	
36	1470	1.05	40.04		
46	1130	1.35	30.88		
49	1070	1.45	29.26		
56	940	1.65	25.61		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
5.5	62	850	1.85	23.08	DK 473 132S4A
	71	745	2.0	20.24	
	80	655	2.2	17.86	
	90	580	2.4	15.84	
	106	495	2.7	13.52	
	116	455	2.2	12.33	
	132	400	2.5	10.81	
	60	880	0.90	23.99	DK 373 132S4A
	63	830	0.95	22.66	
	74	710	1.05	19.29	
	82	645	1.15	17.53	
	94	560	1.25	15.19	
	108	485	1.40	13.22	
	115	460	1.15	12.48	
135	390	1.30	10.63		
148	355	1.35	9.66		
171	305	1.45	8.37		
196	265	1.55	7.28		
7.5	10	7190	1.10	143.47	DK 773 132M4B
	12	6080	1.30	121.46	
	13	5630	1.40	112.41	
	14	5050	1.60	100.75	
	16	4560	1.75	90.96	
	17	4140	1.95	82.61	
	20	3670	2.2	73.30	
	22	3330	2.4	66.52	
	25	2860	2.8	57.17	
	29	2500	3.1	49.90	
	34	2120	3.5	42.33	
	39	1850	3.9	37.00	
	15	4850	0.90	96.80	DK 673 132M4B
	17	4330	1.00	86.52	
	18	3900	1.10	77.89	
	20	3530	1.20	70.54	
	23	3130	1.35	62.55	
	25	2830	1.50	56.55	
	30	2400	1.80	47.93	
	34	2100	2.0	41.87	
	37	1920	2.2	38.29	
	42	1710	2.5	34.22	
	23	3160	0.85	63.00	DK 573 132M4B
	25	2840	0.95	56.64	
	29	2460	1.10	49.16	
	32	2200	1.20	44.02	
	39	1830	1.35	36.52	
	46	1570	1.70	31.38	
	51	1400	1.87	27.87	
	57	1250	2.0	24.92	
	64	1120	2.0	22.40	
	74	970	2.4	19.45	
	82	870	2.5	17.41	
	89	800	2.2	16.00	
	99	725	2.9	14.44	
	46	1550	1.00	30.88	DK 473 132M4B
49	1470	1.05	29.26		
56	1280	1.20	25.61		
62	1160	1.35	23.08		
71	1010	1.50	20.24		
80	890	1.60	17.86		
90	795	1.75	15.84		
106	675	2.0	13.52		
116	620	1.60	12.33		
132	545	1.80	10.81		
150	480	1.95	9.54		
169	425	2.13	8.46		
198	365	2.3	7.22		
11.0	33	3210	0.80	44.02	DK 573 160M4A
	39	2660	0.95	36.52	
	46	2290	1.20	31.38	



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type	
<b>11.0</b>	52	2030	1.30	27.87	<b>DK 573 160M4A</b>	
	58	1820	1.40	24.92		
	64	1630	1.40	22.40		
	74	1420	1.60	19.45		
	83	1270	1.75	17.41		
	90	1170	1.55	16.00		
	100	1050	2.0	14.44		
	115	920	2.2	12.56		
	129	810	1.85	11.16		
	144	730	2.1	10.00		
	174	605	2.3	8.29		
	200	525	2.5	7.21		
	<b>11.0</b>	62	1680	0.90	23.08	<b>DK 473 160M4A</b>
		71	1480	1.00	20.24	
		81	1300	1.10	17.86	
		91	1160	1.20	15.84	
		107	990	1.35	13.52	
		117	900	1.10	12.33	
		133	790	1.25	10.81	
		151	700	1.35	9.54	
170		620	1.45	8.46		
199		530	1.55	7.22		
<b>15.0</b>	26	5610	1.45	57.17	<b>DK 773 160L4B</b>	
	29	4900	1.60	49.90		
	34	4150	1.75	42.33		
	39	3630	2.0	37.00		
	45	3210	2.2	32.68		
	47	3070	2.2	31.28		
	50	2840	2.5	29.00		
	<b>15.0</b>	30	4700	0.90	47.93	<b>DK 673 160L4B</b>
		35	4110	1.05	41.87	
		38	3760	1.15	38.29	
		43	3360	1.30	34.22	
		47	3020	1.40	30.81	
		52	2740	1.55	27.90	
		59	2430	1.75	24.74	
		65	2190	1.95	22.37	
		77	1860	2.3	18.96	
		88	1620	2.7	16.56	
	<b>15.0</b>	47	3080	0.90	31.38	<b>DK 573 160L4B</b>
		52	2730	0.95	27.87	
		59	2440	1.00	24.92	
65		2200	1.05	22.40		
75		1910	1.20	19.45		
84		1710	1.30	17.41		
91		1570	1.15	16.00		
101		1420	1.50	14.44		
116		1230	1.60	12.56		
131		1100	1.35	11.16		
146		980	1.55	10.00		
176		810	1.70	8.29		
202		705	1.85	7.21		
<b>18.5</b>		20	8840	0.90	73.30	
	22	8020	1.00	66.52		
	26	6890	1.15	57.17		
	29	6020	1.30	49.90		
	35	5100	1.45	42.33		
	40	4460	1.60	37.00		
	45	3940	1.85	32.68		
	47	3770	1.80	31.28		
	51	3500	2.1	29.00		
	56	3170	2.3	26.32		
	65	2730	2.6	22.62		
	74	2380	3.0	19.74		
	88	2020	3.5	16.75		
	<b>18.5</b>	35	5050	0.85	41.87	<b>DK673 180M4A</b>
		48	3720	1.15	30.81	
		53	3360	1.30	27.90	
		59	2980	1.45	24.74	
		65	2700	1.60	22.37	



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES




Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
18.5	77	2290	1.90	18.96	DK 673 180M4A
	88	2000	2.2	16.56	
	106	1670	2.6	13.85	
	122	1450	2.7	11.99	
	59	3000	0.85	24.92	DK 573 180M4A
	65	2700	0.85	22.40	
	75	2340	1.00	19.45	
	84	2100	1.05	17.41	
	101	1740	1.20	14.44	
	117	1510	1.30	12.56	
	131	1350	1.10	11.16	
	147	1210	1.25	10.00	
	177	1000	1.40	8.29	
	203	870	1.50	7.21	
22.0	26	8200	1.00	57.17	DK 773 180L4B
	29	7160	1.10	49.90	
	35	6070	1.20	42.33	
	40	5310	1.35	37.00	
	45	4690	1.55	32.68	
	47	4490	1.50	31.28	
	51	4160	1.75	29.00	
	56	3770	1.90	26.32	
	65	3240	2.2	22.62	
	74	2830	2.5	19.74	
	88	2400	2.9	16.75	
	100	2100	3.3	14.63	
	109	1930	2.2	13.43	
	125	1680	2.6	11.73	
	147	1430	2.9	9.94	
	48	4420	0.95	30.81	DK 673 180L4B
	53	4000	1.05	27.90	
	59	3550	1.20	24.74	
	65	3210	1.35	22.37	
	77	2720	1.60	18.96	
	88	2370	1.80	16.56	
	106	1990	2.2	13.85	
	122	1720	2.3	11.99	
	141	1490	1.90	10.41	
	168	1250	2.1	8.71	
	75	2790	0.80	19.45	DK 573 180L4B
	84	2500	0.90	17.41	
	101	2070	1.00	14.44	
117	1800	1.10	12.56		
131	1600	0.95	11.16		
147	1430	1.05	10.00		
177	1190	1.20	8.29		
203	1030	1.25	7.21		
30.0	35	8250	0.90	42.33	DK 773 200L4A
	40	7210	1.00	37.00	
	47	6100	1.10	31.28	
	51	5650	1.25	29.00	
	56	5130	1.40	26.32	
	65	4410	1.65	22.62	
	74	3850	1.85	19.74	
	88	3260	2.2	16.75	
	100	2850	2.4	14.63	
	109	2620	1.65	13.43	
	125	2280	1.90	11.73	
	148	1940	2.2	9.94	
	169	1690	2.4	8.69	
	59	4820	0.90	24.74	DK 673 200L4A
	66	4360	1.00	22.37	
	78	3690	1.15	18.96	
	89	3230	1.35	16.56	
	106	2700	1.60	13.85	
	123	2340	1.65	11.99	
	141	2030	1.40	10.41	
169	1700	1.55	8.71		



# GÜÇ DEVİR TABLOLARI

## GEARED PERFORMANCE TABLES



Motor Gücü Motor Power $P_1$ (kW)	Çıkış Devri Output Speed $n_2$ (min <sup>-1</sup> )	Çıkış Momenti Output Torque $M_2$ (Nm)	Servis Faktörü Service Factor $f_B$	Tahvil Oranı Ratio $i_{ges}$	Tip Type
--	--	---	---	------------------------------------	-------------

<b>37.0</b>	40	8890	0.80	37.00	<b>DK 773 225S4A</b>
	47	7520	0.90	31.28	
	51	6970	1.05	29.00	
	56	6320	1.15	26.32	
	65	5440	1.30	22.62	
	74	4740	1.50	19.74	
	88	4020	1.75	16.75	
	100	3520	1.95	14.63	
	109	3230	1.35	13.43	
	125	2820	1.55	11.73	
	148	2390	1.75	9.94	
169	2090	1.95	8.69		

<b>45.0</b>	51	8480	0.85	29.00	<b>DK 773 225M4B</b>
	56	7690	0.95	26.32	
	65	6610	1.10	22.62	
	74	5770	1.25	19.74	
	88	4890	1.45	16.75	
	100	4280	1.60	14.63	
	109	3930	1.10	13.43	
	125	3430	1.25	11.73	
	148	2910	1.45	9.94	
	169	2540	1.60	8.69	

